


SYSTEMS for INDUSTRY DETROIT, MICHIGAN

Pitot tube, Condensate Pots & D/P Transmitter Installation
in a Down Flow Vertical Line for Steam Service.

DOWN FLOW

Signal lines from sensor to the condensate pots
should have at least 1 inch per foot upslope.

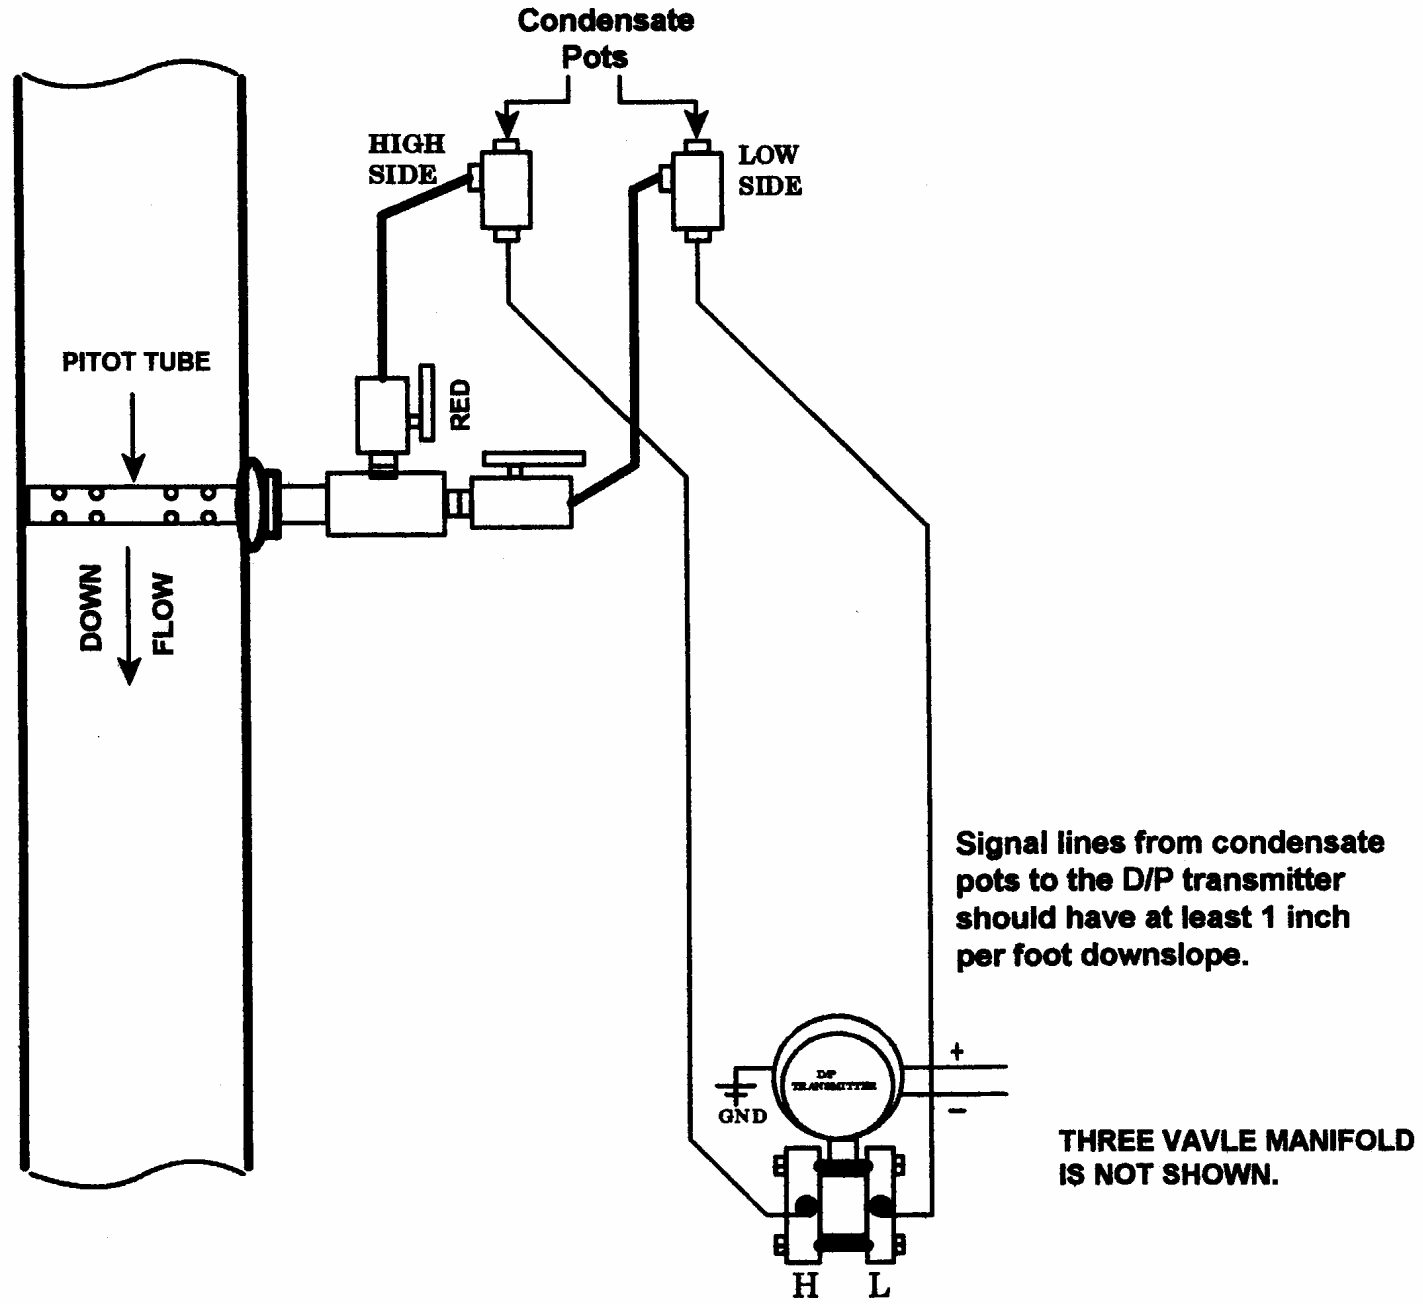

Signal lines from condensate
pots to the D/P transmitter
should have at least 1 inch
per foot downslope.

THREE VALVE MANIFOLD
IS NOT SHOWN.